

## Power Schottky Rectifier - 3Amp 40~100Volt

**Features**

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

**Mechanical data**

- Case : Molded plastic
- Epoxy : UL 94V-0 rate flame retardant
- Lead : Axial leads, solderable per MIL-STD-202,method 208 guaranteed
- Polarity : Color band denotes cathode end
- Mounting position : Any
- Weight : 1.2 grams

**Maximum ratings and Electrical characteristics**

Parameters		SB340L	SB360L	SB3100L	UNIT
Maximum Recurrent Peak Reverse Voltage		40	60	100	V
Maximum RMS Voltage		28	42	70	V
Maximum DC Blocking Voltage		40	60	100	V
Maximum Average Forward Rectified Current		3			A
Peak Forward Surge Current		80			A
Maximum Instantaneous Forward Voltage at 3A	Tc = 25°C	0.50	0.60	0.78	V
	Tc = 125°C	0.40	0.50	0.62	
Maximum Average Reverse Current at Rated DC Blocking Voltage	Tc = 25°C	0.5		0.05	mA
	Tc = 125°C	20		10	
Typical Junction Capacitance		150			pF
Typical Thermal Resistance R <sub>θJA</sub>		30			°C/W
Operating and Storage Temperature Range		-50 to +150		-50 to +175	°C

June 2010 / Rev.6.6

# SB340L ~ SB3100L

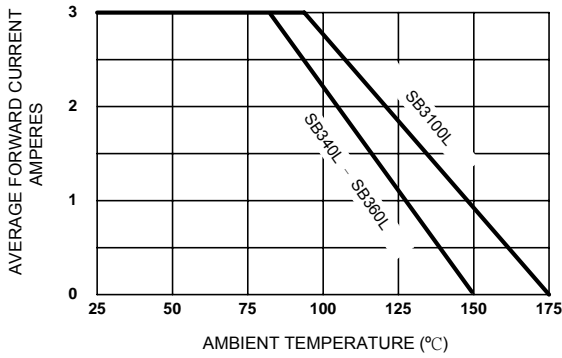


Figure 1. Forward Current Derating Curve

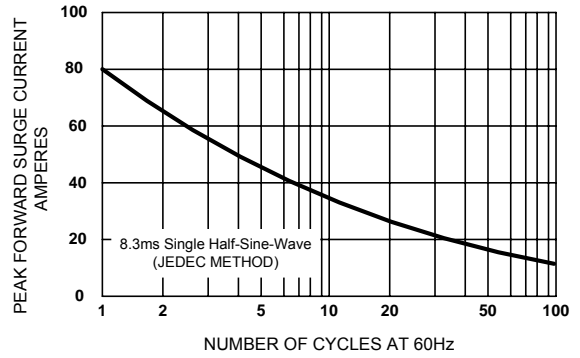


Figure 2. Maximum Non-repetitive Surge Current

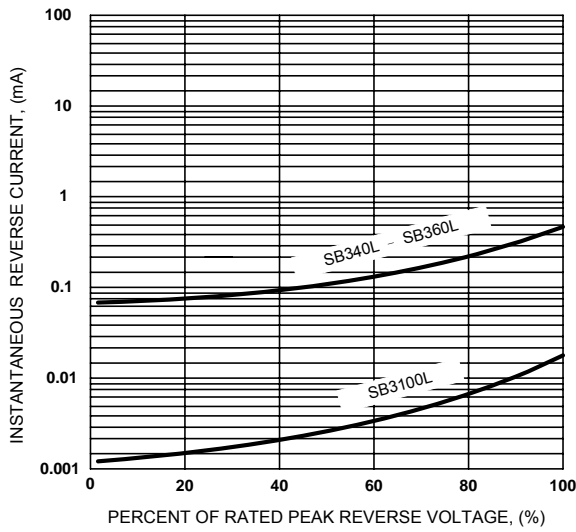


Figure 3. Typical Reverse Characteristics

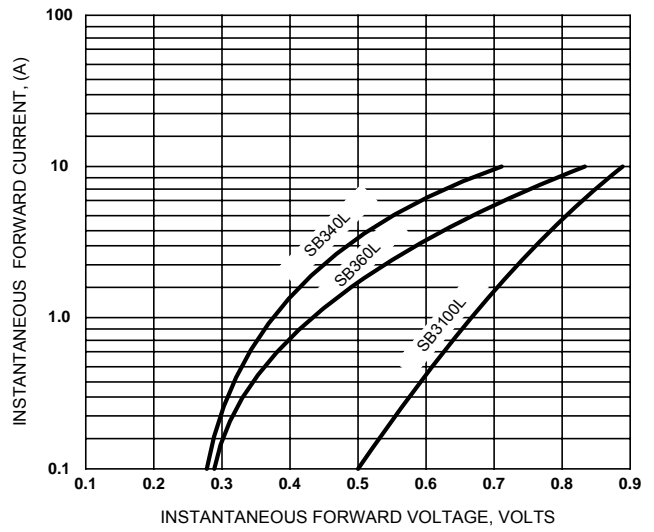


Figure 4. Typical Forward Characteristics

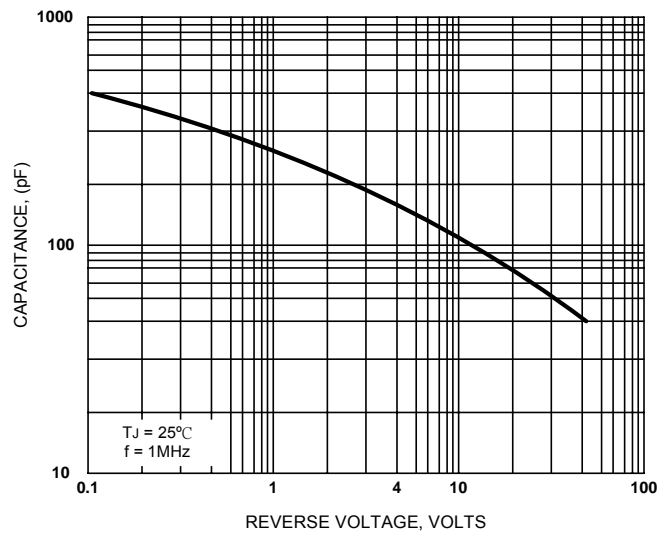


Figure 5. Typical Junction Capacitance



Sirectifier Global Corp., Delaware, U.S.A.

U.S.A.: [sgc@sirectsemi.com](mailto:sgc@sirectsemi.com)  
China: [st@sirectsemi.com](mailto:st@sirectsemi.com)

France: [ss@sirectsemi.com](mailto:ss@sirectsemi.com)  
Thailand: [th@sirectsemi.com](mailto:th@sirectsemi.com)

Taiwan: [se@sirectsemi.com](mailto:se@sirectsemi.com)  
Philippines: [aiac@sirectsemi.com](mailto:aiac@sirectsemi.com)

Hong Kong: [hk@sirectsemi.com](mailto:hk@sirectsemi.com)  
Belize: [belize@sirectsemi.com](mailto:belize@sirectsemi.com)

